

APPLICATIONS / MARKETS













RoHS

SPECIFICATIONS

Electrical Rating: 12mA @ 12VDC
Mechanical Life: 200,000 Cycles
Electrical Life: 200,000 Cycles
Contact Resistance: 50mΩ Max. inital

Insulation Resistance: 100 MΩ Min. @ 500VDC

Dielectric Strength: 500VAC

Operating/Storage Temperature: -20°C to 70°C

Travel: 2.20mm

Contact Arrangement: SPST, DPST

Actuation Force: SPST: 150 gf; DPST: 200 gf

FEATURES & BENEFITS

- · Single pole or double pole functions
- 15mm square, sculptured cap
- · Multiple color options including RGB color


PART NUMBER CONFIGURATOR


Circuit Configuration **LED Color** Mechanical Cap Size Series Configuration **Options Options** Options Options* LP6 1 - SPST RR - Red-Red OA - Momentary A - 15mm square S - Sculptured RG - Red-Green 2 - DPST RB - Red-Blue RY - Red-Yellow RW - Red-White BB - Blue-Blue BW - Blue-White GG - Green-Green GB - Green-Blue GW - Green-White YY - Yellow-Yellow YG - Yellow-Green YB - Yellow-Blue YW - Yellow-White Please refer to individual part number drawings for LED specifications. WW - White-White RGB - Red-Green-Blue


Specifications subject to change without notice

BODY DIMENSIONS

DUAL LED

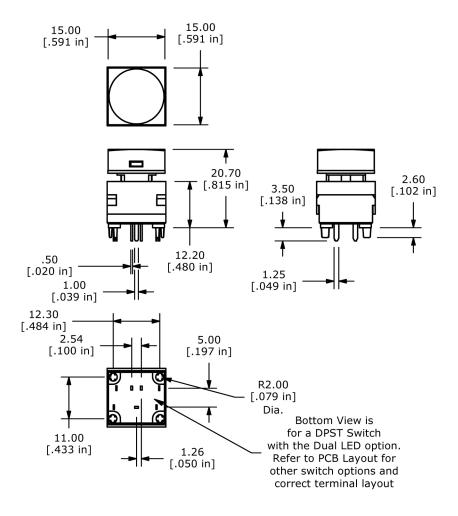

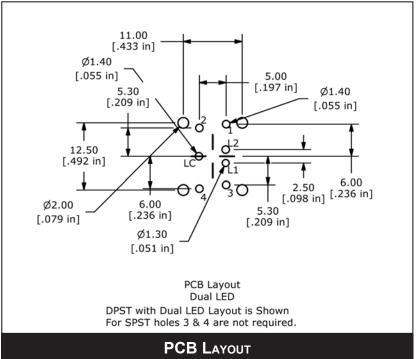



ANTI-VANDAL SWITCHES

DETECTOR SWITCHES

DIP

KEYLOCK SWITCHES

NAVIGATION SWITCHES

TON ROCKER
SWITCHES

ROTARY SWITCHES

SLIDE SWITCHES

SNAP ACTION SWITCHES

TACTILE SWITCHES

3

BODY DIMENSIONS RGB LED

