


PZ SERIES ANTI-VANDAL SWITCH

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS



APPLICATIONS / MARKETS




Audio / Visual



Security Devices




Industrial Controls



Kiosks



Electrical Housewares



Medical Equipment

SPECIFICATIONS

Contact Rating: 1A @ 5-24VDC
Electrical Life: 50,000,000 Cycles
Contact Resistance: 1Ω Max.
Operating Temperature: -20°C to 65°C
Storage Temperature: -25°C to 65°C
Panel Thickness: 10mm Max.
Moisture Protection: IP68 (in house tested)

FEATURES & BENEFITS

- 19mm and 22mm panel cutouts
- Ring illumination options
- RGB color options
- Bezel options
- IP68 (in house tested)

PART NUMBER CONFIGURATOR

Series	Size Options	Function	Housing	Bezel	Illumination Style	LED-Color Options	Wire Length
PZ	4 - 19mm 7 - 22mm	M - Momentary/Pulse	1 - Black Anodized (Double Flat) 2 - Clear Anodized (Double Flat)	C - Concave F - Flat	N - Non-Illuminated R - Ring Illuminated	N - Non-Illuminated R - RGB	W150 - 150mm (with 1x6 Conn) W300 - 300mm (with 1x6 Conn)

Specifications subject to change without notice 1.19.2022



E-SWITCH®


www.e-switch.com

800.867.2717


1

PZ SERIES ANTI-VANDAL SWITCH

BODY DIMENSIONS 19MM OPTION CONCAVE BEZEL

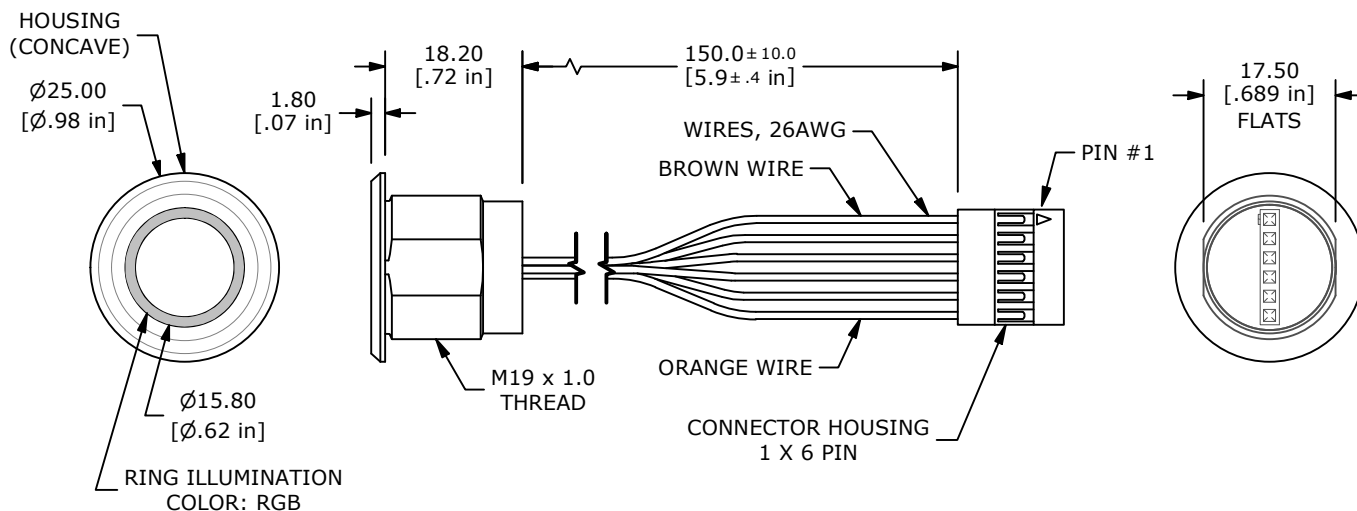

BODY DIMENSIONS 22MM OPTION CONCAVE BEZEL

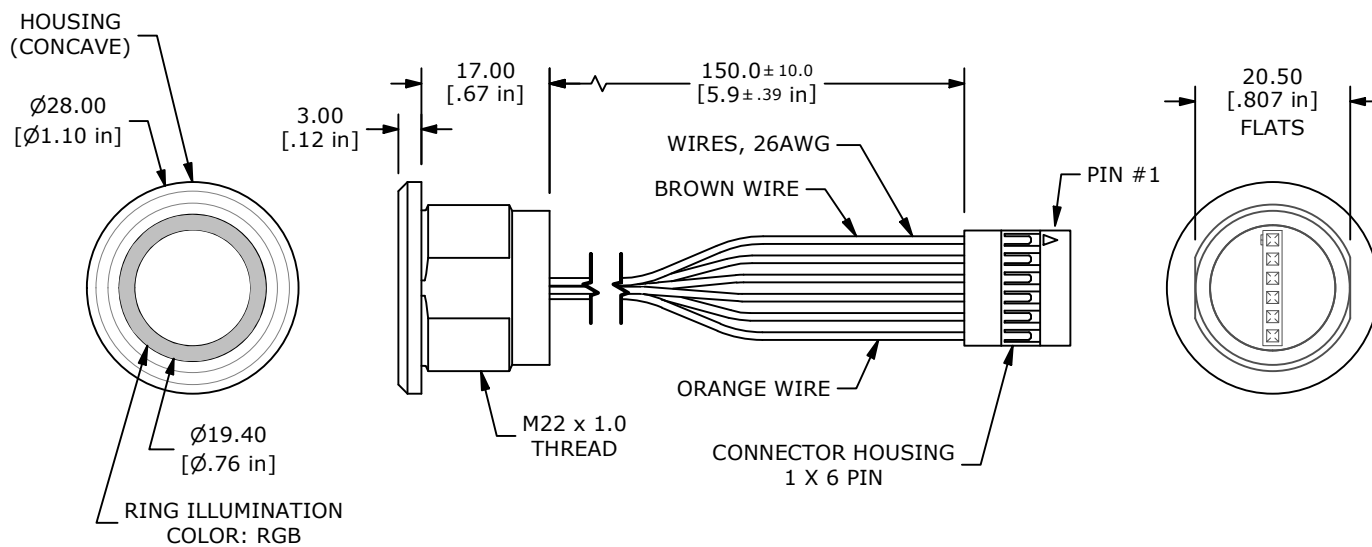

E-SWITCH®

www.e-switch.com

800.867.2717

2

ANTI-VANDAL
SWITCHES

DETECTOR
SWITCHES

DIP
SWITCHES

KEYLOCK
SWITCHES

NAVIGATION
SWITCHES

PUSHBUTTON
SWITCHES

ROCKER
SWITCHES

ROTARY
SWITCHES

SLIDE
SWITCHES

SNAP ACTION
SWITCHES


TACTILE
SWITCHES

TOGGLE
SWITCHES


CAP
OPTIONS

PZ SERIES ANTI-VANDAL SWITCH

BODY DIMENSIONS 19MM OPTION FLAT BEZEL

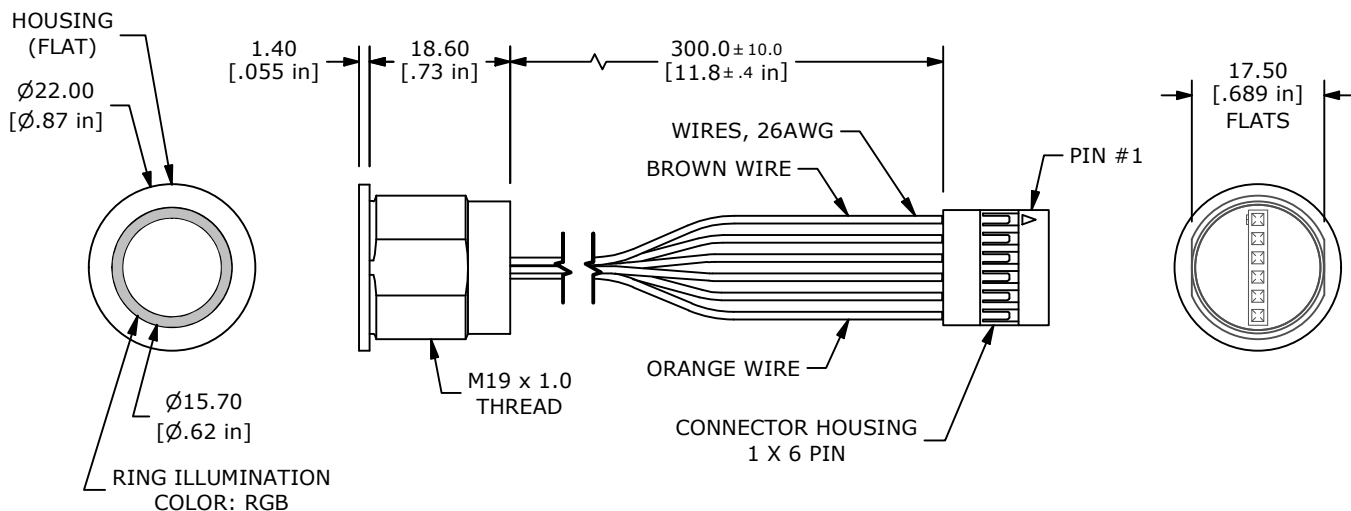


BODY DIMENSIONS 22MM OPTION FLAT BEZEL

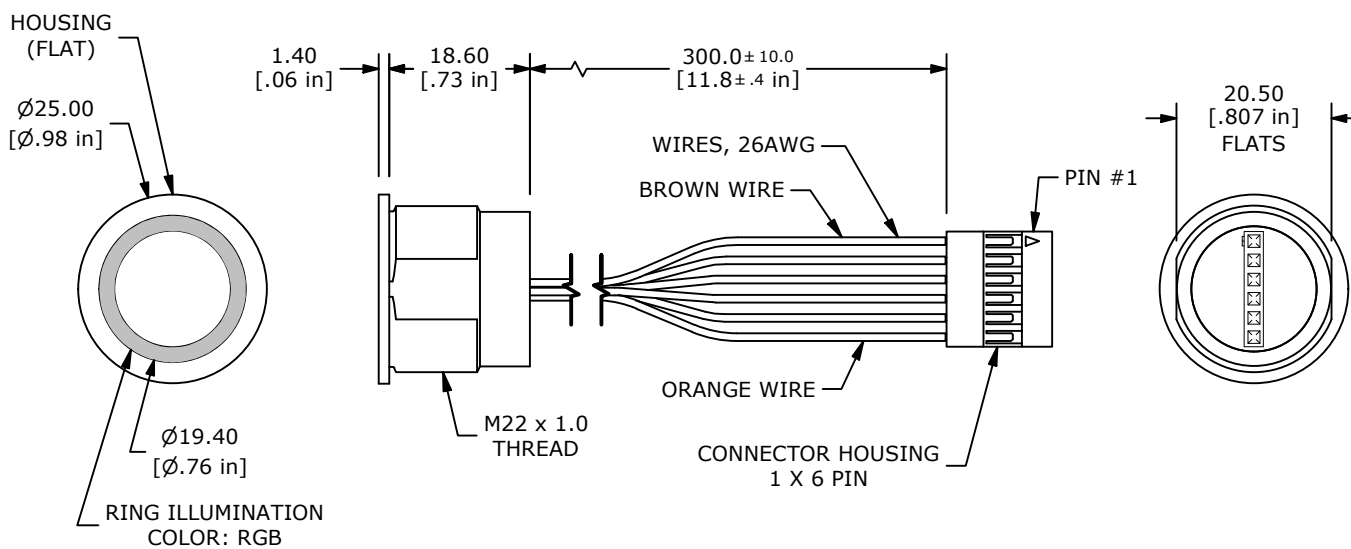


PZ SERIES ANTI-VANDAL SWITCH

PANEL CUTOUT & SCHEMATIC

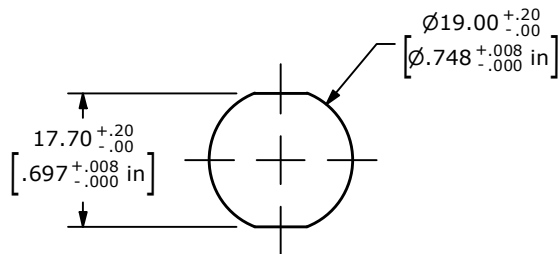


19MM - CUTOUT

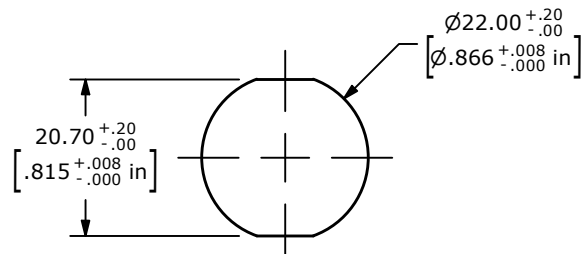


22MM - CUTOUT

RECOMMENDED PANEL CUTOUT

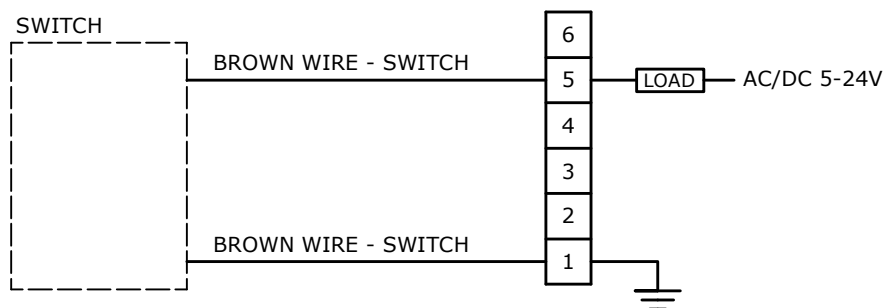

SCHEMATIC
MOMENTARY/PULSE Non-ILLUMINATED

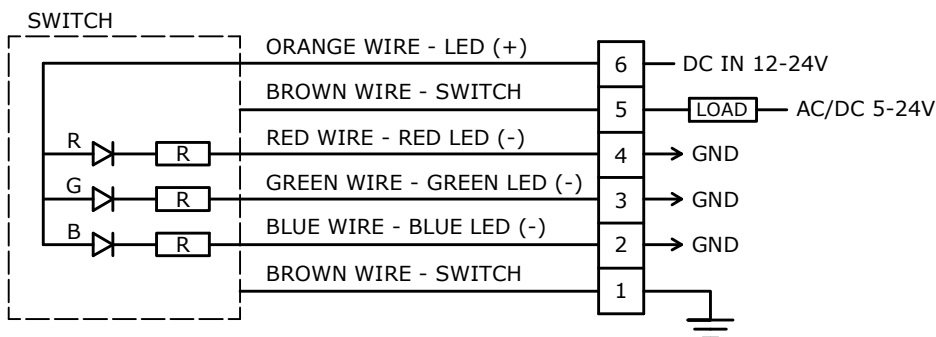

SCHEMATIC
MOMENTARY/PULSE ILLUMINATED - RGB

SCHEMATICS

