

TL3360 SERIES TACT SWITCH

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS




APPLICATIONS / MARKETS




Audio / Visual



Computer Peripherals




Consumer Electronics



Instrumentation



Telecommunication



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating: 50mA @ 12VDC
Electrical Life: 200,000 Cycles
Contact Resistance: 100mΩ Max.
Insulation Resistance: 100M Ω Min. at 500VDC
Dielectric Strength: 250VAC for 1 min.
Operating Temperature: -25°C to 70°C
Storage Temperature: -30°C to 80°C
Operating Force: 185 gf, 260 gf
Travel: 0.15mm
Contact Arrangement: SPST
Contact Material: Silver or Gold

FEATURES & BENEFITS

- Multiple actuator height options
- Right angle Surface mount
- Multiple operating force options
- Solder pad option
- Auto placement tab option

PART NUMBER CONFIGURATOR

Series	Actuator Option	Actuation Force	Solder Pad	Auto Placement Tab	Contact Material
 TL3360	 A - 2.30mm B - 2.80mm C - 4.0mm D - 4.35mm	 F185 - 185 gf F260 - 260 gf	 NONE - With Solder Pad K - Without Solder Pad	 NONE - Without Tab K - With Tab	 Q - Silver R - Gold

Specifications subject to change without notice 12.5.2022



E-SWITCH®




www.e-switch.com

800.867.2717


1

BODY DIMENSIONS



WITH SOLDER PAD, WITHOUT AUTO PLACEMENT TAB

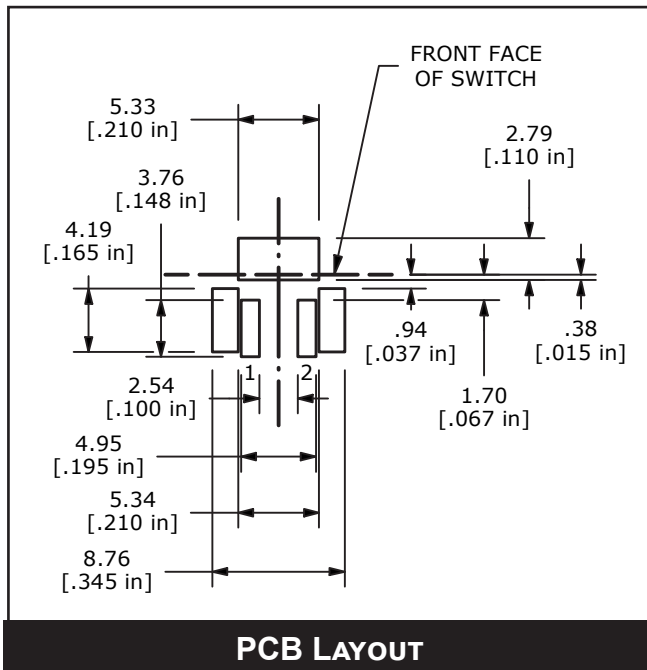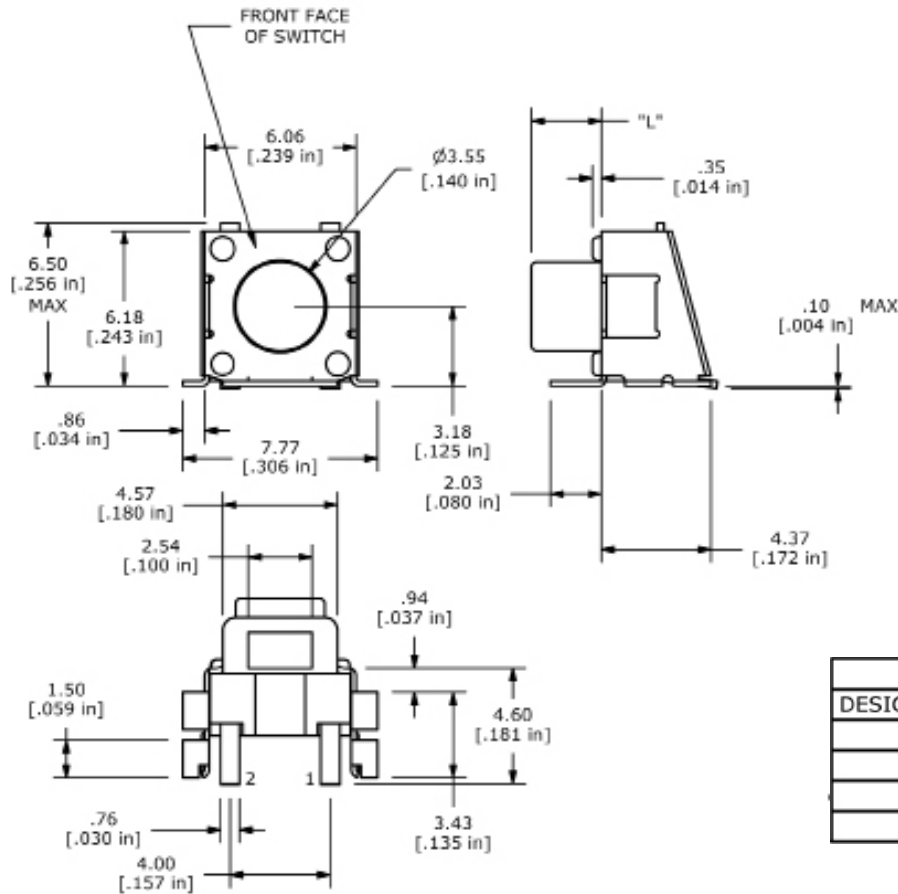

BODY DIMENSIONS
WITHOUT SOLDER PAD, WITHOUT AUTO PLACEMENT TAB

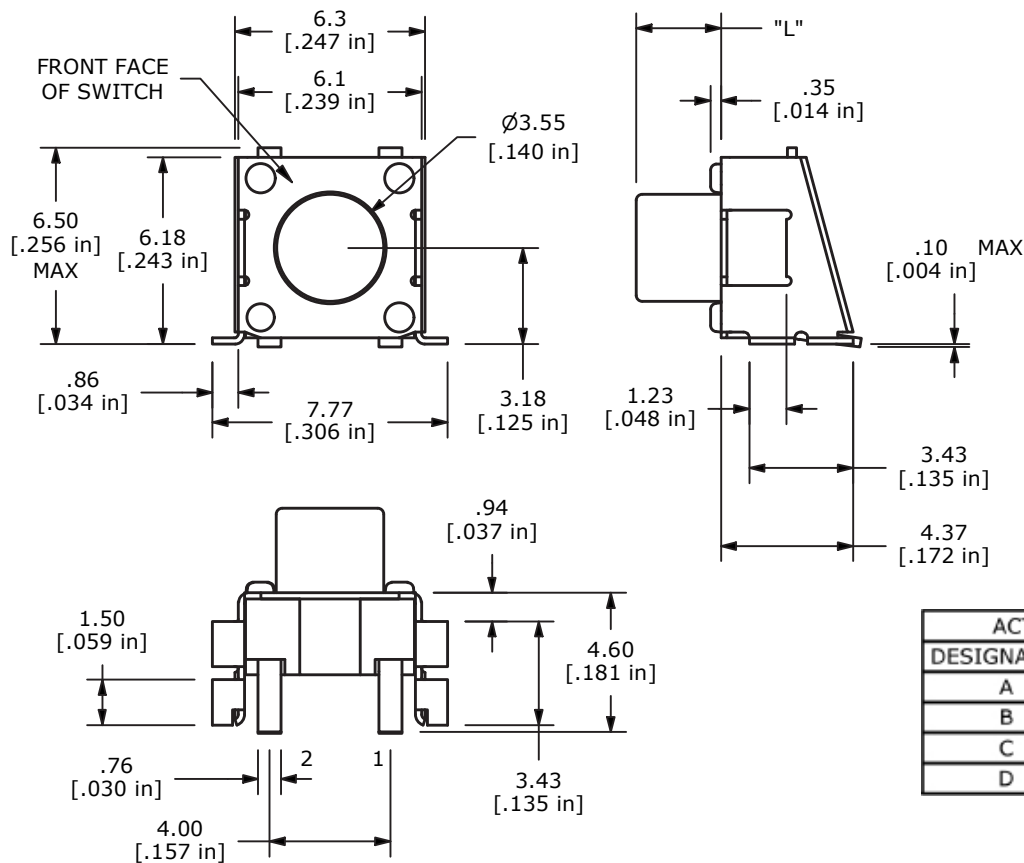


ACTUATOR CHART	
DESIGNATION	"L" DIM
A	2.30
B	2.80
C	4.00
D	4.35

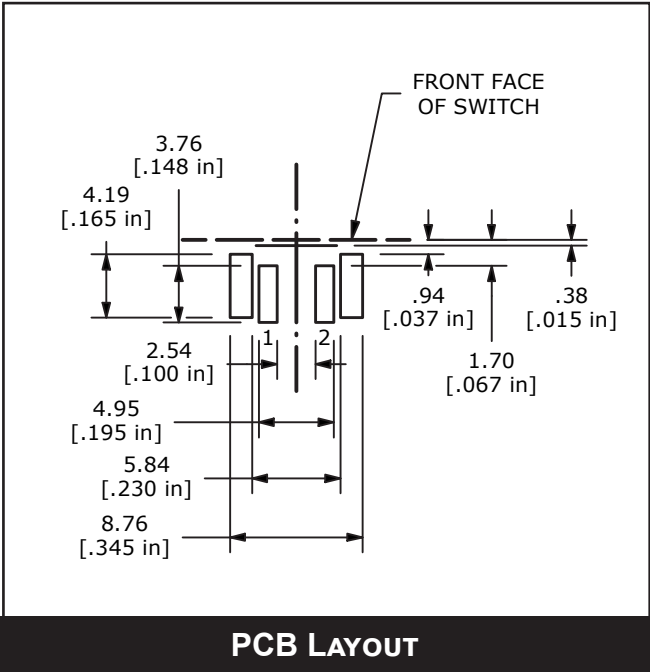

TL3360 SERIES TACT SWITCH

BODY DIMENSIONS

WITH SOLDER PAD, WITH AUTO PLACEMENT TAB

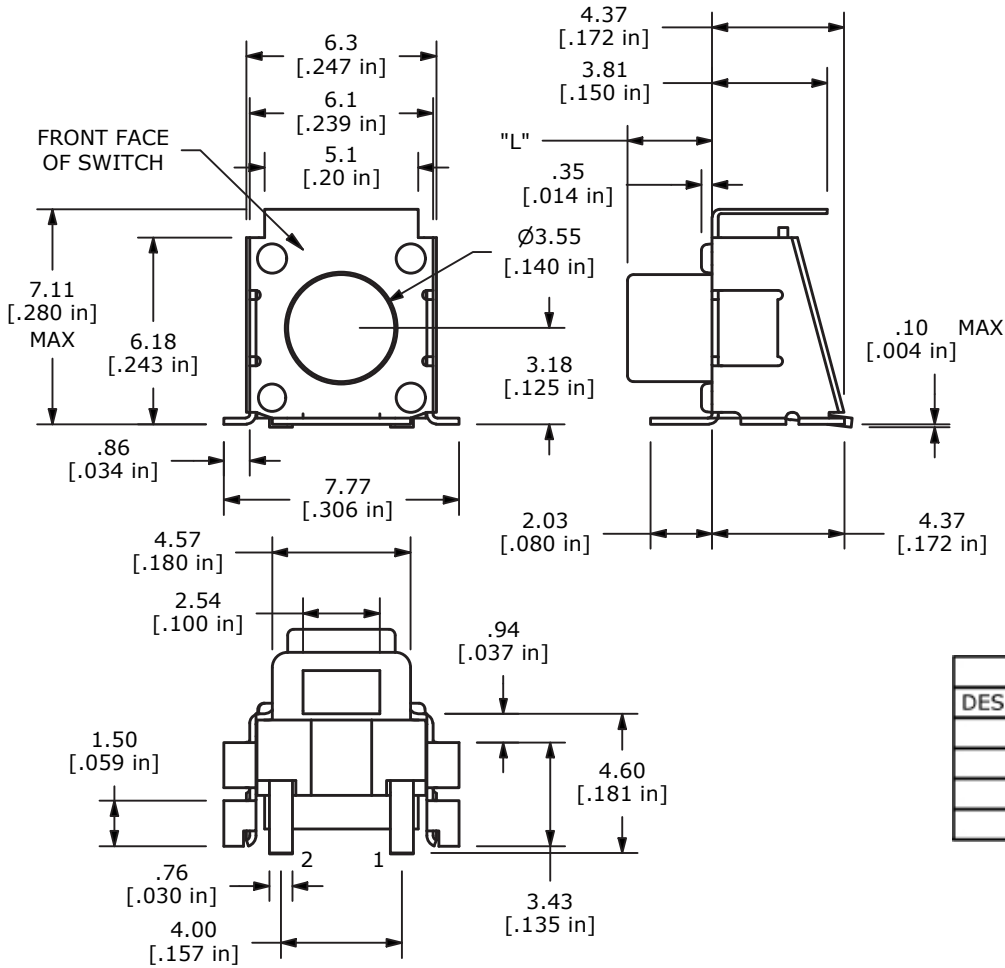

ACTUATOR CHART	
DESIGNATION	"L" DIM
A	2.30
B	2.80
C	4.00
D	4.35

