SERIES 400 B SWITCHES

ROCKER SWITCHES - SMT SUBMINIATURE



FEATURES & BENEFITS

- ► Variety of switching functions
- ► Sub-miniature
- ► Surface mount
- ► Sealed to IP67


APPLICATIONS/MARKETS

- ► Telecommunications
- ► Instrumentation
- ► Test equipment
- ► Networking
- ► Computer peripherals

SPECIFICATIONS			
Contact Rating: Silver - 3A @ 120VAC or 28VDC			
Gold - 0.4 VA @ 20 VAC or VDC			
Life Expectancy:	50,000 make-and-break cycles at full load		
Contact Resistance:	20mΩmax. initial @ 2-4 VDC 100 mA		
Insulation Resistance: $1000M\Omega$ min.			
Dielectric Strength:	1,000 V RMS @ sea level		
Operating Temperature: -30° C to 85° C			
Packaging:	Tape & Reel		
MATERIALS			
Case & Bushing:	High temp material, glass filled 4/6 Nylon, flame retardant, heat stabilized (UL94-VO)		
Actuator:	Brass, chrome plated with internal O-ring seal standard		
Switch Support:	Brass/Steel, tin or tin-lead plated		
Contacts / Terminals:	Silver or gold plate over nickel plated copper alloy		
Terminal Seal:	Ероху		





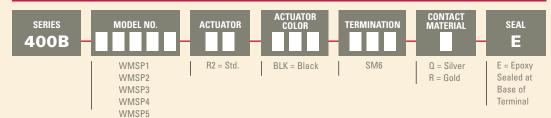


POS 1	POS 2	POS 3
ON	NONE	ON
ON	NONE	(ON)
ON	OFF	ON
(ON)	OFF	(ON)
ON	OFF	(ON)
2-3	OPEN	2-1
	ON ON ON (ON)	ON NONE ON NONE ON OFF (ON) OFF ON OFF


() = Momentary

Example Ordering Number 400B-WMSP1-R2-BLK-SM6-Q-E

Specifications subject to change without notice.10.9.2020

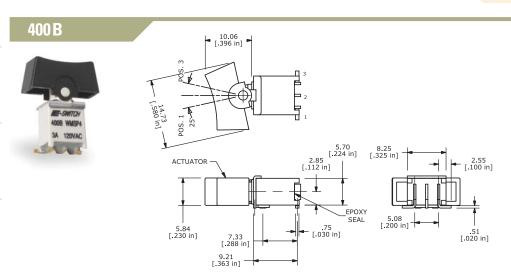

Phone: 800-867-2717







162

Fax: 763-531-8235