


ECM3025 SERIES FREE HANGING RECEPTACLE HOUSING

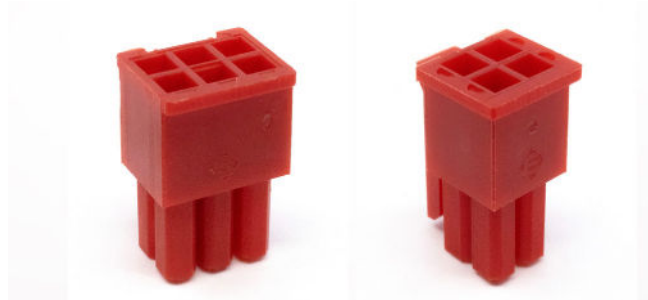

SPECIFICATIONS

Voltage Rating: 250VAC
Current Rating: 5A max
Housing: PA66, UL94V-0
Insulation Resistance: 100Mohm min
Withstanding: 100Mohm min
Operating Temperature: -25°C to +85°C
Poles: 2-10
Wire Range: 28-22AWG

FEATURES & BENEFITS

Free Hanging 3mm spacing
Wire to Wire Receptacle to Plug system
Compatible with ECM3022 and ECM3026 Series
Low Profile Design
2 to 10 Poles
ECM5556F2822C - female

PART NUMBER CONFIGURATOR

Series



ECM3025

Function



02 - 2 Pins
04 - 4 Pins
06 - 6 Pins
10 - 10 Pins

Color



R - Red

Terminal Type



S - 28-22AWG Socket


NOTES:

Specifications based on using ESW Crimp Terminals (Sold Separately)




Specifications subject to change without notice 5/16/2025

ECM3025 SERIES FREE HANGING RECEPTACLE HOUSING

BODY AND TERMINAL DIMENSIONS

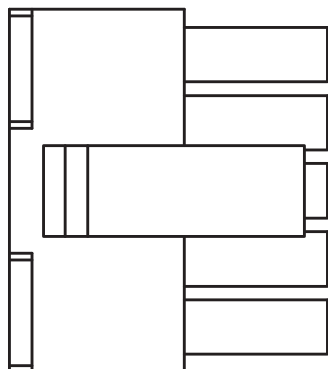

OBJECT NAME	NO. OF POS.	DIM "X"
ECM302202R	2	4.00 [.156 in]
ECM302204R	4	7.00 [.276 in]
ECM302206R	6	10.00 [.394 in]
ECM302210R	10	16.00 [.630 in]

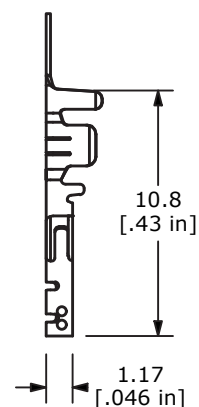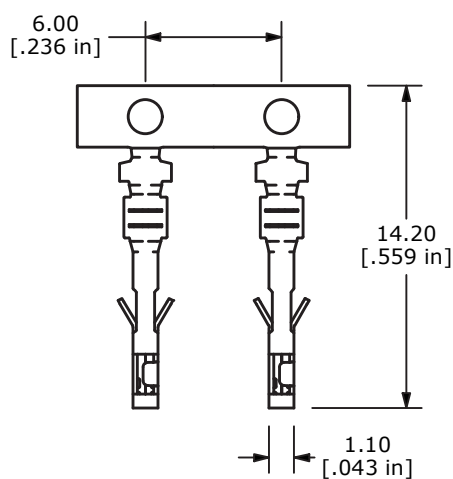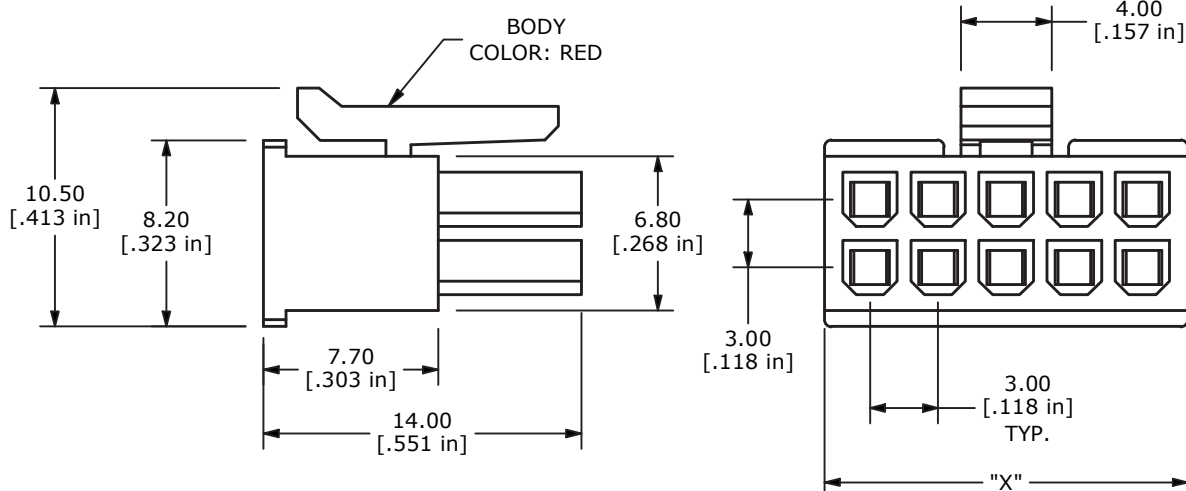

ECM3025 SERIES FREE HANGING RECEPTACLE HOUSING

PIN POSITIONS

